


RECYFIX® STANDARD

ENVIRONMENTALLY FRIENDLY DRAINAGE.

FOR DOMESTIC APPLICATIONS AND PEDESTRIAN AREAS.

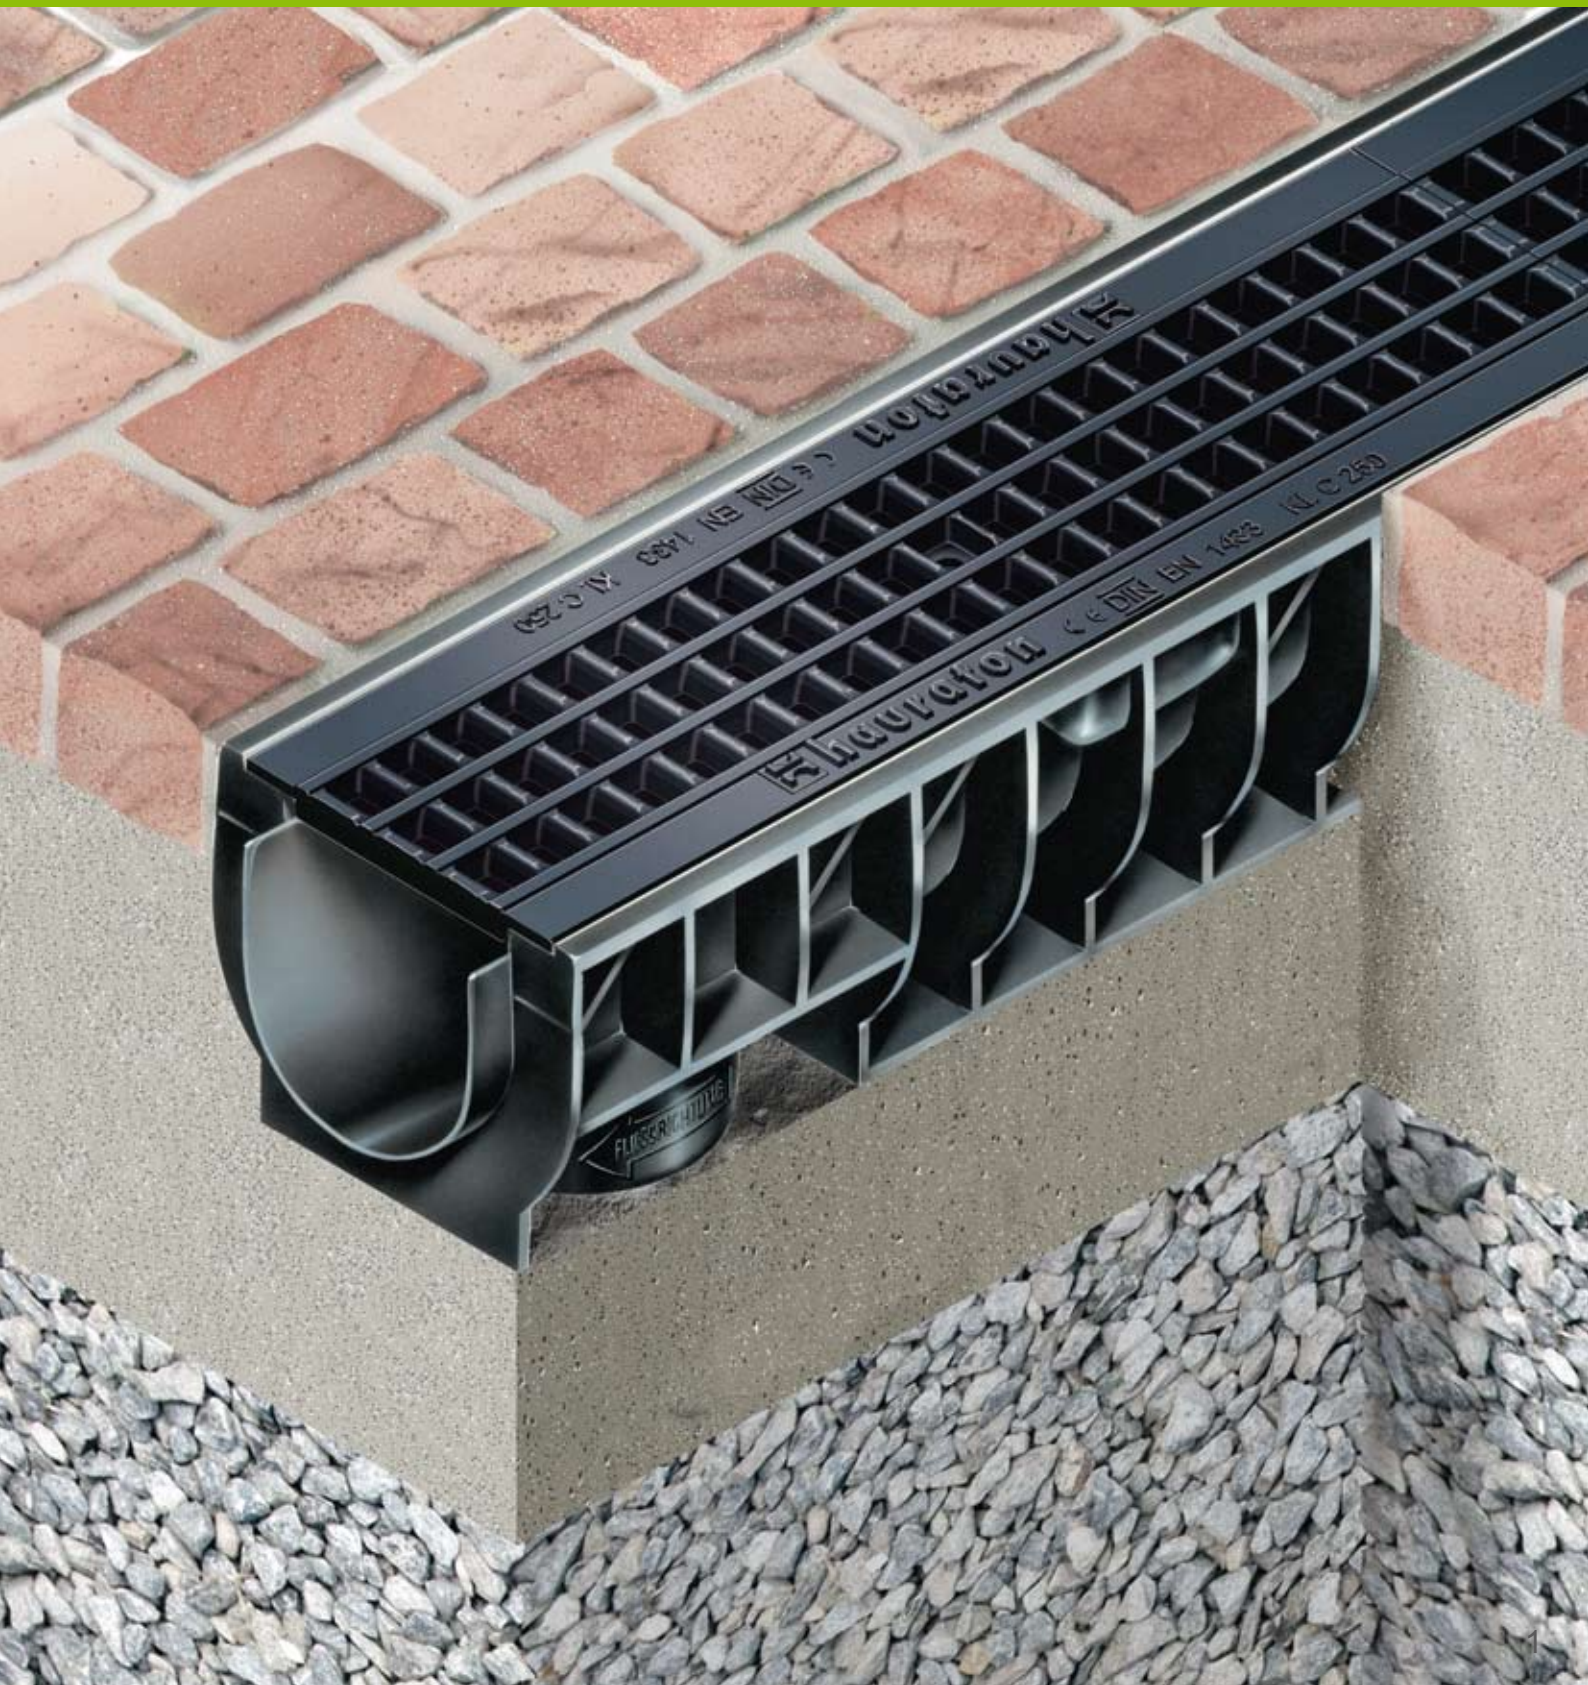

AT A GLANCE

- ✓ Easy and fast to install
- ✓ For domestic applications up to load class C 250
- ✓ Strength and function comply with DIN EN 1433



RECYFIX® STANDARD

ENVIRONMENTALLY FRIENDLY DRAINAGE.

FOR DOMESTIC APPLICATIONS AND PEDESTRIAN AREAS.

THE ECOLOGICAL INNOVATION

RECYFIX STANDARD channels consist of 100% pure recycled polyolefin plastics. They can be integrated into the ecological material cycle and are 100% recyclable. Green light for the environment! Because of their low weight, RECYFIX STANDARD channels are easy to transport and install. Nevertheless, in functionality and strength the system compares well with all conventional channel systems - a fact that has been proven in practice.

HIGH-TECH DEVELOPMENT

RECYFIX STANDARD channels have been developed in cooperation with a well-known research institute for plastic recycling. With the help of computer simulation it was possible to create a highly rigid construction with torsion-free ribs, which weighs significantly less than conventional channels made of mineral-based materials but has equally good performance characteristics and durability.

APPLICATION AREAS

- primarily private areas
- garage entrances
- yards
- terraces
- gardens
- parks

CHARACTERISTICS

- made of PE-PP
- up to load class C 250
- pre-formed vertical and lateral connections
- complies with DIN EN 1433

PRODUCT RANGE

- Trash boxes
- End caps
- Foul air traps
- Locking handles
- GUGI ductile iron mesh gratings
- Ductile iron gratings
- Slotted gratings
- Mesh gratings
- Perforated gratings
- Closed covers



RECYCLED PE-PP MATERIAL

RECYFIX STANDARD channels consist of 100% pure recycled polyolefin plastics. The material is characterised by its high chemical resistance, resistance to frost and salt, it is UV-stabilised, environmentally neutral and leakproof.

DIN EN 1433

All RECYFIX STANDARD channels meet the requirements of the European standard DIN EN 1433. The products carry the CE-mark.

A COMPREHENSIVE SYSTEM

RECYFIX STANDARD channels are available in different heights and nominal widths. Canal connections are possible at the bottom, on the sides or ends. A choice of channel gratings is available to suit different surface finishes and load applications. The system is rounded off with end caps, foul air locks for vertical outlet and trash boxes with mud bucket - optionally with internal foul air trap. To achieve safety under the exposure to traffic the channel gratings are locked to the base segment.



It is very easy to cut RECYFIX STANDARD channels on site - e.g. mitred cuts, corner joints and channels cut to length.



CASTRIES, Médiathèque, France

RECYFIX®
PLUS

RECYFIX®
STANDARD

SLOTTED
CHANNELS

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

DACHFIX®

RECYFIX®
GREEN SUPER

RECYFIX®
GREEN STANDARD




RECYFIX®
STREIF


LINEFIX®

RECYFIX® STANDARD

ENVIRONMENTALLY FRIENDLY DRAINAGE.
FOR DOMESTIC APPLICATIONS AND PEDESTRIAN AREAS.


RECYFIX STANDARD channels meet the requirements of DIN EN 1433 and are suitable for the following loading capacities:

-  **CATEGORY A 15,**
LOAD CLASS 15 KN
-  **CATEGORY B 125,**
LOAD CLASS 125 KN
-  **CATEGORY C 250,**
LOAD CLASS 250 KN

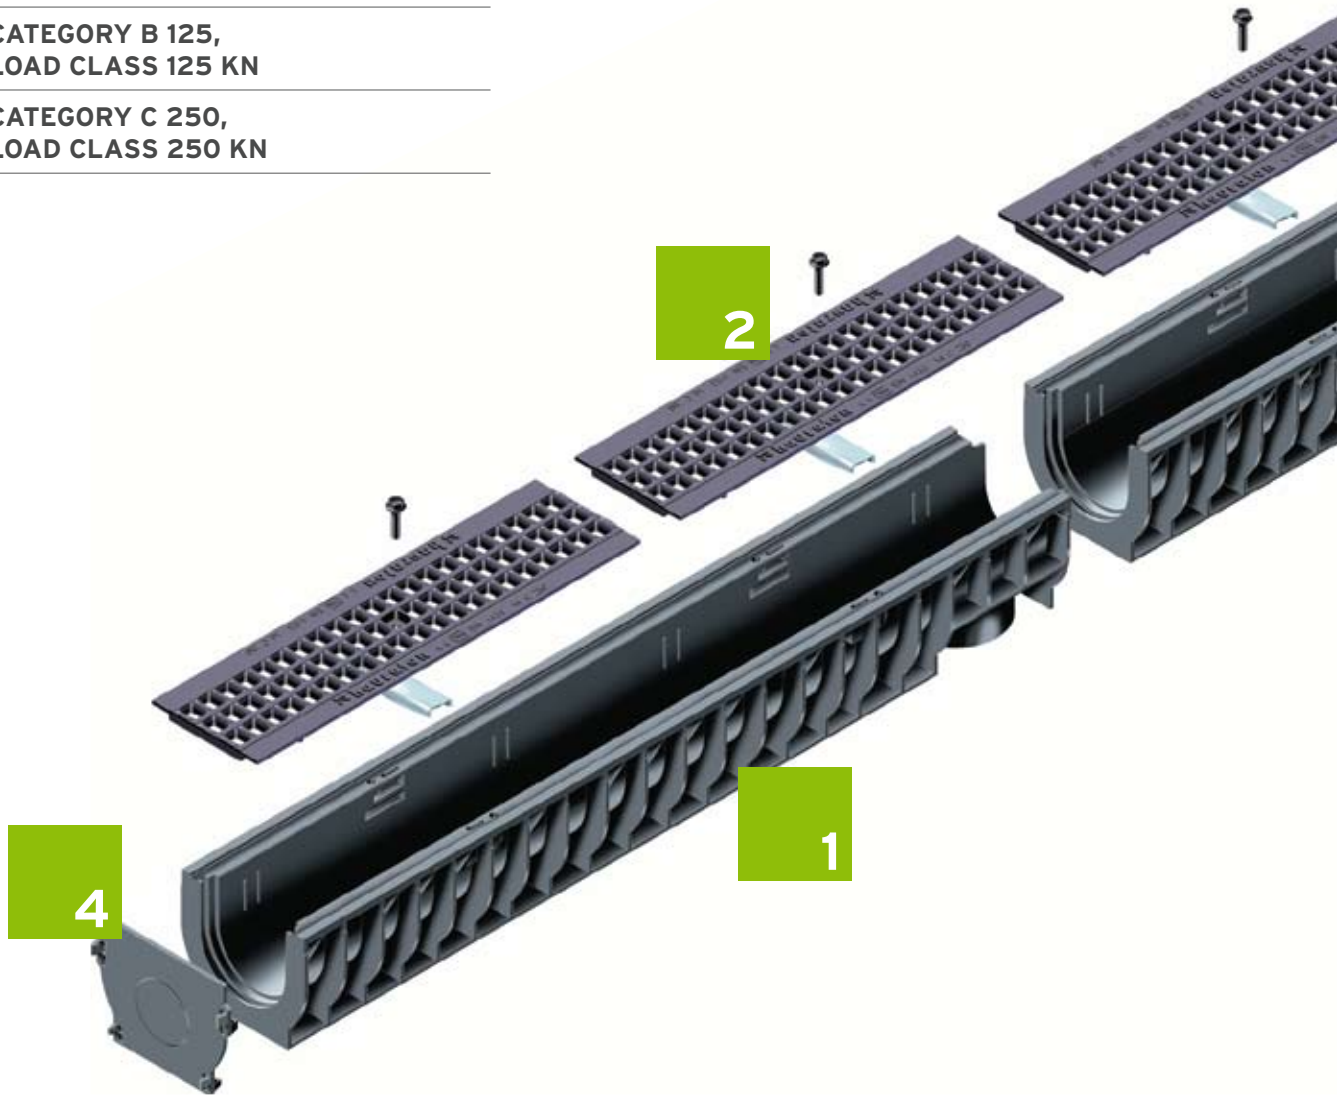


GRATING OPTIONS FOR RECYFIX STANDARD CHANNELS

GUGI-Ductile iron mesh gratings* Ductile iron gratings* Slotted gratings* Steel mesh gratings*

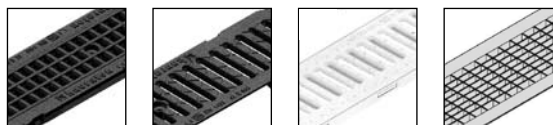

| Loading capacities as per DIN EN 1433 suitable for passenger car traffic | GUGI-Ductile iron mesh gratings* | Ductile iron gratings* | Slotted gratings* | Steel mesh gratings* |
|--|----------------------------------|------------------------|-------------------|----------------------|
| B 125 | | | 100 | 100 |
| C 250 | 100, 150, 200, 300 | 100, 200 | | 100, 150, 200 |

* nominal width

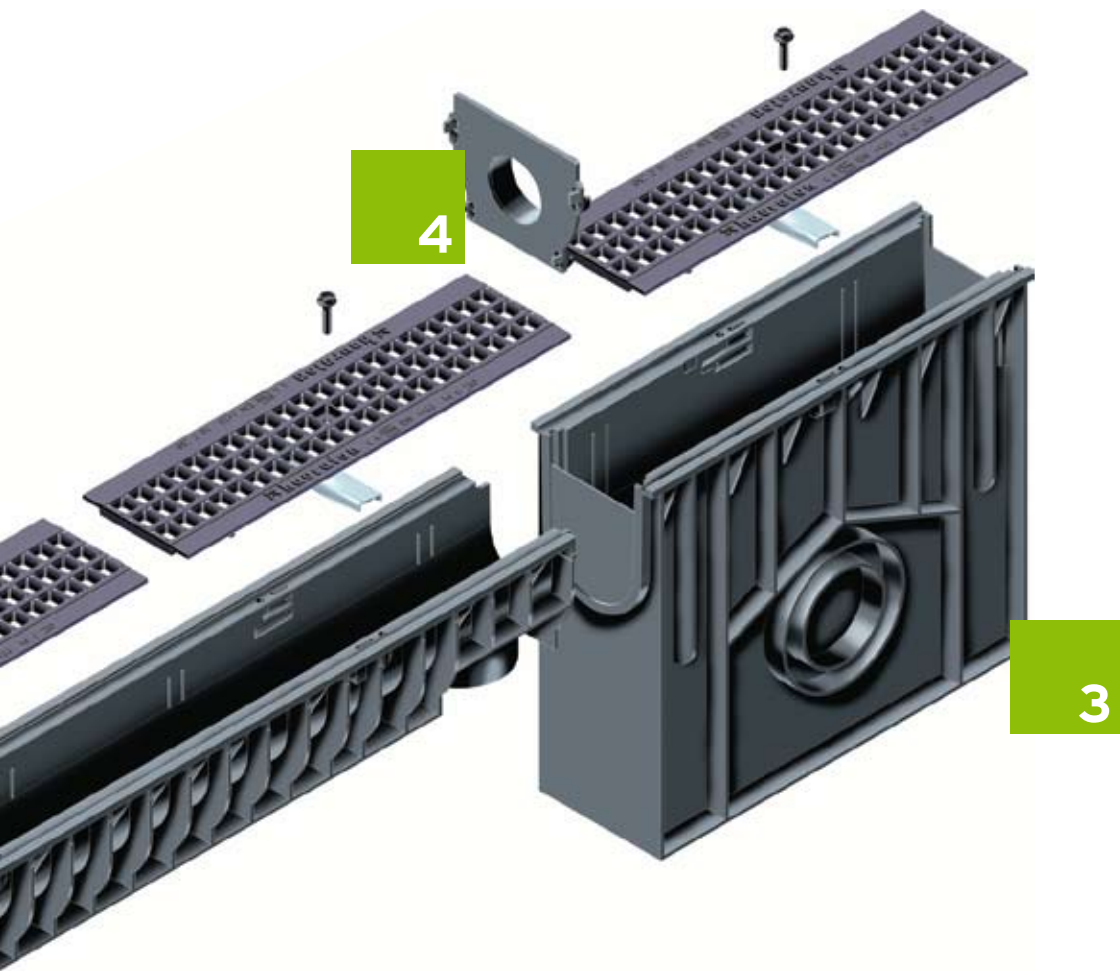

1

■ Channels made of PE-PP, according DIN V 19580 / EN 1433, CE-conform, with tongue and groove connection for exact installation

2

■ numerous grating options, for exemple GUGI-Ductile iron mesh gratings

3

■ Trash box with pipe-connection possibilities

4



■ end caps with and without outlets

| | | | | | | | | | |
|----------|-----------------|-------------------------|----------------------|----------|------------------------------|--------------------|------------------|-------------------|---------------|
| LINEFIX® | RECYFIX® STREIF | RECYFIX® GREEN STANDARD | RECYFIX® GREEN SUPER | DACHFIX® | RECYFIX®POINT FASERFIX®POINT | FASERFIX® STANDARD | SLOTTED CAHNNELS | RECYFIX® STANDARD | RECYFIX® PLUS |
|----------|-----------------|-------------------------|----------------------|----------|------------------------------|--------------------|------------------|-------------------|---------------|





RECYFIX® STANDARD 100

RECYFIX® STANDARD 100 - Combi article, class A 15

Type 80 with perforated grating, stainless steel, locked*

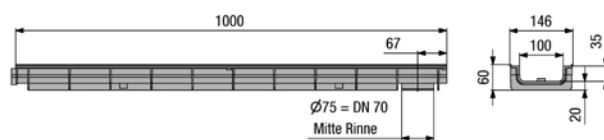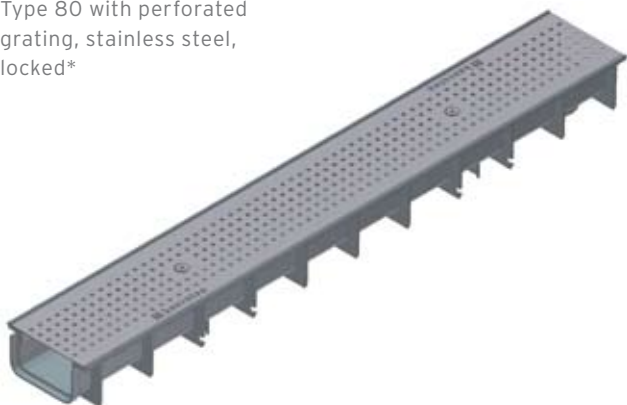

Type 010 with perforated grating, stainless steel, locked

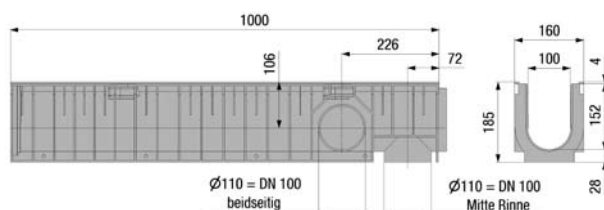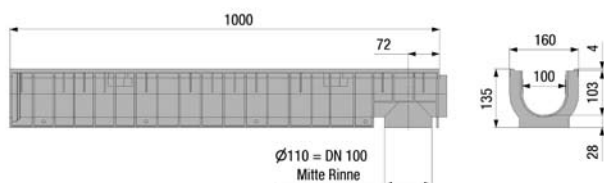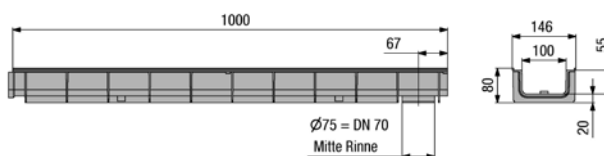
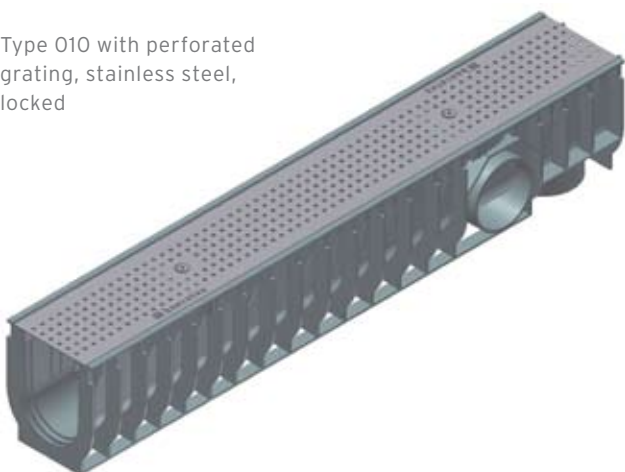


| | Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. galvanised | Article No. stainless steel |
|---|--------------|-------------|--------------|---|---|--------------|---------------------------|-----------------------------------|
| Type 60 with perforated grating, stainless steel, locked* | 1000 | 146 | 60 | 25 | 161 | 2,9 | - | 41244 |
| Type 80 with perforated grating, stainless steel, locked* | 1000 | 146 | 80 | 45 | 161 | 3,1 | - | 41246 |
| Type 01 with perforated grating, stainless steel, locked | 1000 | 160 | 135 | 92 | 161 | 4,5 | - | 41240 |
| Type 010 with perforated grating, stainless steel, locked | 1000 | 160 | 185 | 142 | 161 | 5,4 | - | 41242 |
| Type 0105 with perforated grating, stainless steel, locked | 500 | 160 | 135 | 92 | 161 | 2,3 | - | 41247 |
| Type 01005 with perforated grating, stainless steel, locked | 500 | 160 | 185 | 142 | 161 | 2,7 | - | 41248 |




RECYFIX® STANDARD 100

RECYFIX® STANDARD 100 - Combi article, car traffic

Type 60 with slotted grating
SW 75/9, locked*

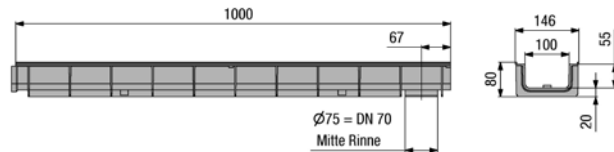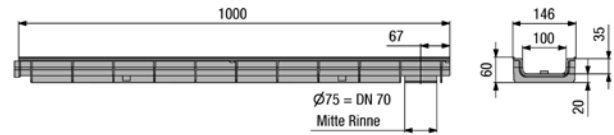

Type 01 with slotted grating
SW 75/9, locked

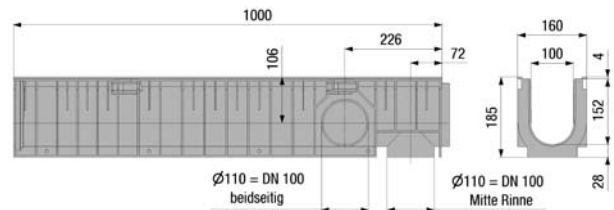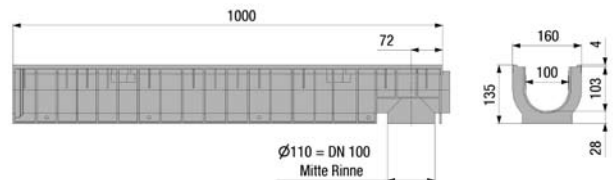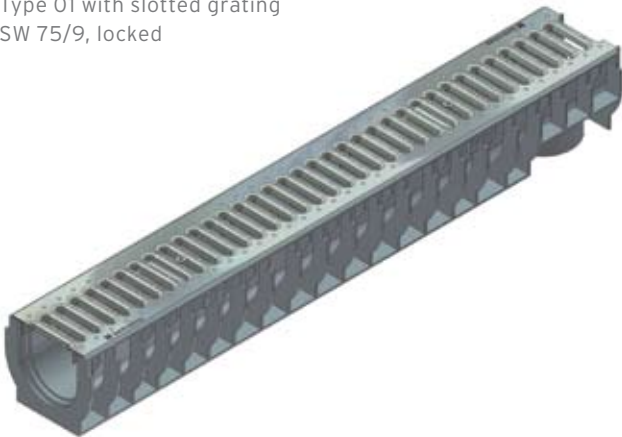

| | Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. galvanised | Article No. stainless steel |
|--|--------------|-------------|--------------|---|---|--------------|---------------------------|-----------------------------------|
| Type 60 with slotted grating SW 75/9, locked* | 1000 | 146 | 60 | 25 | 280 | 3,0 | 40236 | 41204 |
| Type 80 with slotted grating SW 75/9, locked* | 1000 | 146 | 80 | 45 | 280 | 3,1 | 40246 | 41206 |
| Type 60 with mesh grating MW 30/10, locked* | 1000 | 146 | 60 | 25 | 650 | 4,2 | 40237 | 41214 |
| Type 80 with mesh grating MW 30/10, locked* | 1000 | 146 | 80 | 45 | 650 | 4,3 | 40247 | 41216 |
| Type 01 with slotted grating SW 75/9, locked | 1000 | 160 | 135 | 92 | 280 | 4,4 | 40231 | 41200 |
| Type 0105 with slotted grating SW 75/9, locked | 500 | 160 | 135 | 92 | 280 | 2,2 | 40261 | 41207 |
| Type 010 with slotted grating SW 75/9, locked | 1000 | 160 | 185 | 142 | 280 | 5,3 | 40296 | 41202 |
| Type 01005 with slotted grating SW 75/9, locked | 500 | 160 | 185 | 142 | 280 | 2,6 | 40266 | 41208 |
| Type 01 with mesh grating MW 30/10, locked | 1000 | 160 | 135 | 92 | 650 | 5,2 | 40232 | 41210 |
| Type 0105 with mesh grating MW 30/10, locked | 500 | 160 | 135 | 92 | 650 | 2,6 | 40262 | 41217 |
| Type 010 with mesh grating MW 30/10, locked | 1000 | 160 | 185 | 142 | 650 | 6,6 | 40297 | 41212 |
| Type 01005 with mesh grating MW 30/10, locked | 500 | 160 | 185 | 142 | 650 | 3,2 | 40267 | 41218 |

The quality of the stainless steel material is according CNS 1.4301.

RECYFIX®
PLUS

RECYFIX®
STANDARD

SLOTTED
CAHNNELS

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

DACHFIX®

RECYFIX®
GREEN SUPER

RECYFIX®
GREEN STANDARD



RECYFIX®
STREIF

LINEFIX®



RECYFIX® STANDARD 100

RECYFIX® STANDARD 100 - Combi article, class B 125

Type 80 with mesh grating
MW 30/10, galvanised,
locked*

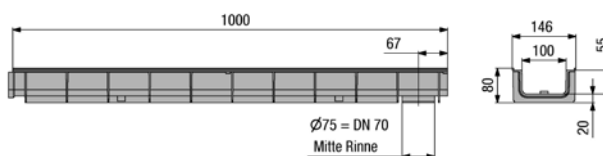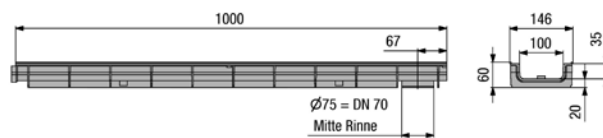

Type 010 with mesh grating
MW 30/10, galvanised,
locked

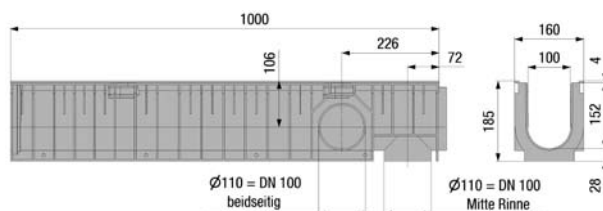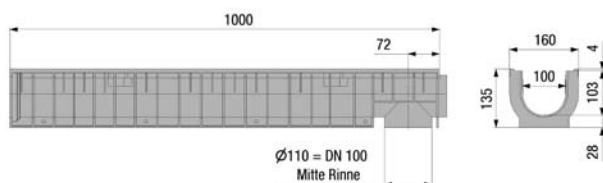


| | Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|---|--------------|-------------|--------------|---|---|--------------|----------------|
| Type 60 with mesh grating MW 30/10, galvanised, locked* | 1000 | 146 | 60 | 25 | 650 | 5,0 | 41224 |
| Type 80 with mesh grating MW 30/10, galvanised, locked* | 1000 | 146 | 80 | 45 | 650 | 5,1 | 41226 |
| Type 01 with mesh grating MW 30/10, galvanised, locked | 1000 | 160 | 135 | 92 | 650 | 5,2 | 41220 |
| Type 0105 with mesh grating MW 30/10, galvanised, locked | 500 | 160 | 135 | 92 | 650 | 3,4 | 41227 |
| Type 010 with mesh grating MW 30/10, galvanised, locked | 1000 | 160 | 185 | 142 | 650 | 6,6 | 41222 |
| Type 01005 with mesh grating MW 30/10, galvanised, locked | 500 | 160 | 185 | 142 | 650 | 3,8 | 41228 |

* For common frequented areas we recommend FASERFIX SUPER KS channels, flat (catalogue CIVILS).





RECYFIX® STANDARD 100

RECYFIX® STANDARD 100 - Combi article, class C 250

Type 80 with GUGI-Ductile iron mesh grating MW 20/30, black, locked*

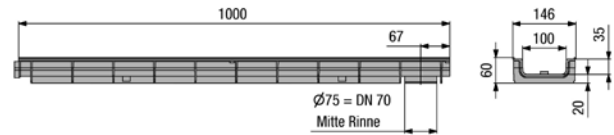

Type 01 with ductile iron grating SW 80/14, black, locked

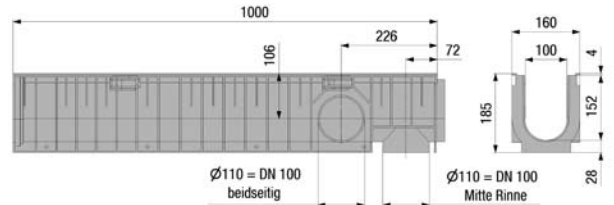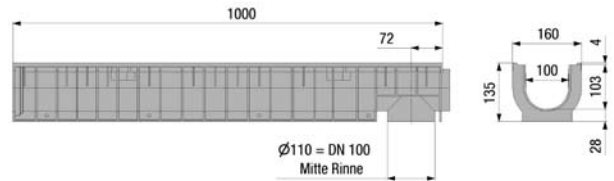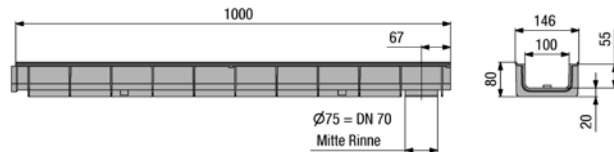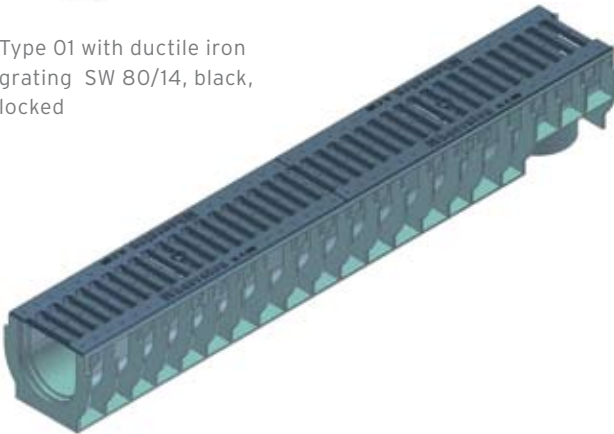

| | Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|---|--------------|-------------|--------------|---|--|--------------|----------------|
| Type 60 with GUGI-Ductile iron mesh grating MW 20/30, black, locked* | 1000 | 146 | 60 | 25 | 444 | 5,4 | 40239 |
| Type 80 with GUGI-Ductile iron mesh grating MW 20/30, black, locked* | 1000 | 146 | 80 | 45 | 444 | 5,5 | 40253 |
| Type 60 with ductile iron grating SW 80/14, black, locked* | 1000 | 146 | 60 | 25 | 450 | 5,8 | 40238 |
| Type 60 with ductile iron grating, black, SW 6 mm, with locking device* | 1000 | 146 | 60 | 25 | 290 | 7,6 | 41234 |
| Type 80 with ductile iron gating SW 80/14, black, locked* | 1000 | 146 | 80 | 45 | 450 | 5,9 | 40248 |
| Type 80 with ductile iron grating, black, SW 6 mm, with locking device* | 1000 | 146 | 80 | 45 | 290 | 7,7 | 41236 |
| Type 01 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 1000 | 160 | 135 | 92 | 449 | 7,7 | 40234 |
| Type 0105 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 500 | 160 | 135 | 92 | 444 | 3,8 | 40264 |
| Type 010 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 1000 | 160 | 185 | 142 | 444 | 8,6 | 40299 |
| Type 01005 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 500 | 160 | 185 | 142 | 444 | 4,2 | 40269 |
| Type 01 with ductile iron grating SW 80/14, black, locked | 1000 | 160 | 135 | 92 | 450 | 8,2 | 40233 |
| Type 01 with ductile iron grating, SW 6 mm, locked | 1000 | 160 | 135 | 92 | 290 | 9,2 | 41230 |
| Type 0105 with ductile iron grating SW 80/14, black, locked | 500 | 160 | 135 | 92 | 450 | 4,1 | 40263 |
| Type 0105 with ductile iron grating, black, SW 6 mm, locked | 500 | 160 | 135 | 92 | 290 | 4,6 | 41237 |
| Type 010 with ductile iron grating SW 80/14, black, locked | 1000 | 160 | 185 | 142 | 450 | 9,1 | 40298 |
| Type 010 with ductile iron grating, SW 6 mm, locked | 1000 | 160 | 185 | 142 | 290 | 10,1 | 41232 |
| Type 01005 with ductile iron grating SW 80/14, black, locked | 500 | 160 | 185 | 142 | 450 | 4,5 | 40268 |
| Type 01005 with ductile iron grating, black, SW 6 mm, locked | 500 | 160 | 185 | 142 | 290 | 5,0 | 41238 |

* For common frequented areas we recommend FASERFIX SUPER KS channels, flat (catalogue CIVILS).

RECYFIX® STANDARD 100


RECYFIX® STANDARD 100 - Accessories



Trash box with plastic bucket, slotted grating, SW 75/9, trafficable, locked



Trash box with plastic bucket, ductile iron grating SW 80/14, black, class C 250, locked




Foul air trap, vertical, DN 100



Foul air trap DN 100, inside



End cap combined made of PE-PP with outlet DN 70, type 01



End cap combined made of PE-PP with outlet DN 70, type 010

| | Length mm | Width mm | Height mm | Weight kg | Article No. galvanised | Article No. stainless steel |
|---|--------------|-------------|--------------|--------------|---------------------------|--------------------------------|
| Trash box with plastic bucket, slotted grating, SW 75/9, trafficable, locked | 500 | 160 | 419 | 4,3 | 40256 | 41209 |
| Trash box with plastic bucket, mesh grating MW 30/10, trafficable, locked | 500 | 160 | 419 | 4,9 | 40257 | 41219 |
| Trash box with plastic bucket, mesh grating MW 30/10, galvanised, class B 125, locked | 500 | 160 | 419 | 5,5 | 41229 | - |
| Trash box with plastic bucket and GUGI-Ductile iron mesh grating MW 20/30, black, class C 250, locked | 500 | 160 | 419 | 6,0 | 40259 | - |
| Trash box with plastic bucket, ductile iron grating SW 80/14, black, class C 250, locked | 500 | 160 | 419 | 6,2 | 40258 | - |
| Trash box with plastic bucket and ductile iron grating, SW 6 mm, black, cl. C 250 locked | 500 | 160 | 419 | 6,9 | 41239 | - |
| Trash box with plastic-bucket, with perforated grating, stainless steel, car-traffic, locked | 500 | 160 | 419 | 4,6 | - | 41249 |
| Foul air trap, vertical, DN 100 | - | - | - | 0,5 | 40295 | - |
| Foul air trap DN 100, inside | - | - | - | 0,2 | 40290 | - |
| End cap closed, made of PE-PP, for type 60 | - | 147 | 60 | - | 40284 | - |
| End cap closed, made of PE-PP, for Type 80 | - | 147 | 80 | - | 40291 | - |
| End cap combined made of PE-PP with outlet DN 70, type 01 | - | 160 | 135 | 0,1 | 40281 | - |
| End cap combined made of PE-PP with outlet DN 70, type 010 | - | 160 | 185 | 0,2 | 40283 | - |
| Drilling of connecting holes DN 100 | - | - | - | - | 972 | - |
| Cutting to length of NW 100 | - | - | - | - | 990 | - |
| Sealing material SikaBond TS Fast, 600 ml, tubular bag, black | - | - | - | 0,6 | 6890 | - |
| Tubular pistol for Sikaflex TS Fast | - | - | - | 1,3 | 6891 | - |

The quality of the stainless steel material is according CNS 1.4301.



RECYFIX® STANDARD 100

| | | | | | | | | | |
|-----------------|----------------------------|------------------------------------|---------------------------------|-----------------|---|-------------------------------|-----------------------------|------------------------------|--------------------------|
| LINEFIX® | RECYFIX® STREIF | RECYFIX® GREEN STANDARD | RECYFIX® GREEN SUPER | DACHFIX® | RECYFIX®POINT FASERFIX®POINT | FASERFIX® STANDARD | SLOTTED CHANNELS | RECYFIX® STANDARD | RECYFIX® PLUS |
|-----------------|----------------------------|------------------------------------|---------------------------------|-----------------|---|-------------------------------|-----------------------------|------------------------------|--------------------------|

RECYFIX® STANDARD 150

RECYFIX® STANDARD 150 - Combi article, car traffic

Type 01 with slotted grating,
galvanised

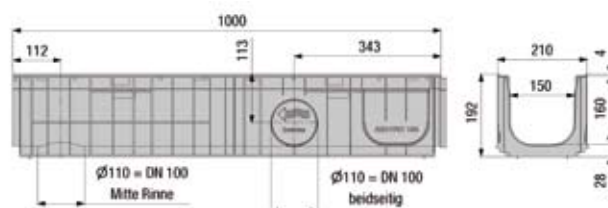
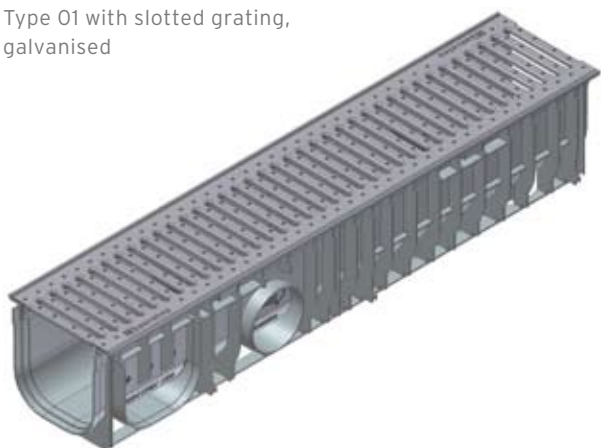


| Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|--------------|-------------|--------------|---|---|--------------|----------------|
|--------------|-------------|--------------|---|---|--------------|----------------|

| | | | | | | | |
|--|------|-----|-----|-----|-----|-----|-------|
| Type 01 with slotted grating, galvanised | 1000 | 210 | 192 | 225 | 390 | 5,2 | 40163 |
|--|------|-----|-----|-----|-----|-----|-------|

RECYFIX® STANDARD 150 - Combi article, class B 125

Type 01 with mesh grating
MW 30/30, galvanised,
locked

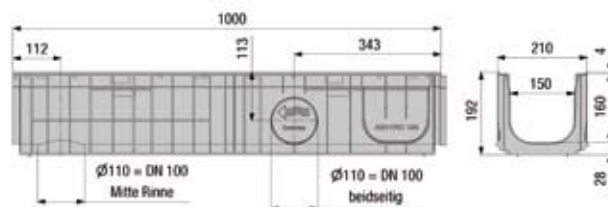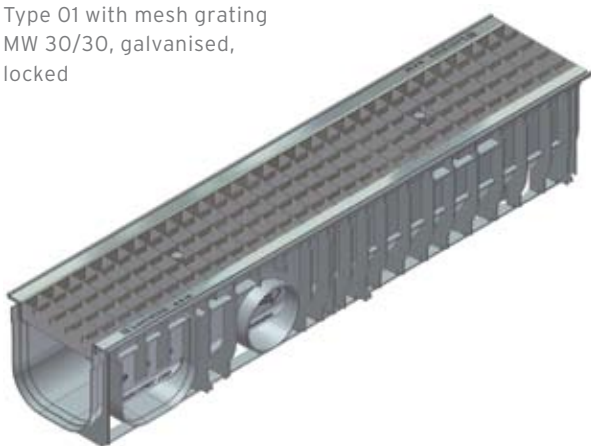



| Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|--------------|-------------|--------------|---|---|--------------|----------------|
|--------------|-------------|--------------|---|---|--------------|----------------|

| | | | | | | | |
|--|------|-----|-----|-----|------|-----|-------|
| Type 01 with mesh grating MW 30/30, galvanised, locked | 1000 | 210 | 192 | 225 | 1081 | 7,7 | 40171 |
| Type 0105 with mesh grating MW 30/30, galvanised, locked | 500 | 210 | 192 | 225 | 1081 | 3,8 | 40146 |
| Type 01 with mesh grating MW 30/10, galvanised, locked | 1000 | 210 | 192 | 225 | 1098 | 8,7 | 40177 |
| Type 0105 with mesh grating MW 30/10, galvanised, locked | 500 | 210 | 192 | 225 | 1098 | 4,5 | 40148 |

RECYFIX® STANDARD 150

RECYFIX® STANDARD 150 - Combi article, class C 250

Tyyp 01 with GUGI-Ductile iron mesh grating MW 20/30, black, locked

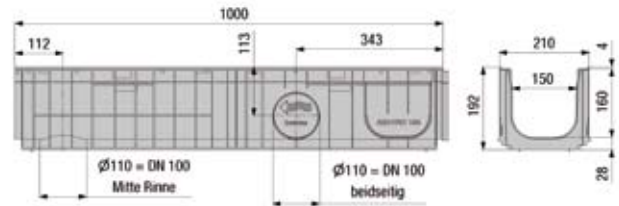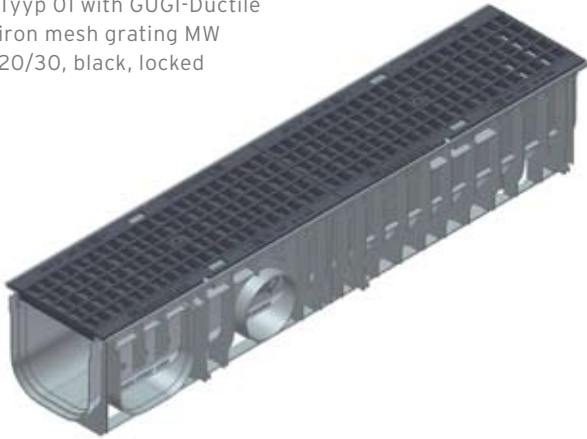

| | Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|---|--------------|-------------|--------------|---|---|--------------|----------------|
| Tyyp 01 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 1000 | 210 | 192 | 225 | 745 | 11,9 | 40174 |
| Type 0105 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 500 | 210 | 192 | 225 | 745 | 6,0 | 40149 |

RECYFIX® PLUS

RECYFIX® STANDARD

SLOTTED CAHNNELS

FASERFIX® STANDARD

RECYFIX® POINT
FASERFIX® POINT

DACHFIX®

RECYFIX® GREEN SUPER



RECYFIX® GREEN STANDARD

RECYFIX® STREIF

LINEFIX®

RECYFIX® STANDARD 150


RECYFIX® STANDARD 150 - Accessories




Trash box with galvanised bucket, with mesh grating MW 30/10, galvanised, class B 125, locked



Foul air trap, vertical, DN 100



Foul air trap DN 100, inside



End cap combined made of PE-PP with outlet DN 70/100, Type 01



| | Length mm | Width mm | Height mm | Weight kg | Article No. |
|--|--------------|-------------|--------------|--------------|----------------|
| Trash box with galvanised bucket, with mesh grating MW 30/30, galvanised, class B125, locked | 500 | 210 | 495 | 19,9 | 40154 |
| Trash box with galvanised bucket, with mesh grating MW 30/10, galvanised, class B 125, locked | 500 | 210 | 495 | 17,8 | 40156 |
| Trash box with galvanise bucket with GUGI-Ductile iron mesh grating MW 20/30, black, class C 250, locked | 500 | 210 | 495 | 19,6 | 40153 |
| Foul air trap, vertical, DN 100 | - | - | - | 0,5 | 40295 |
| Foul air trap DN 100, inside | - | - | - | 0,2 | 40290 |
| End cap combined made of PE-PP with outlet DN 70/100, Type 01 | - | 210 | 202 | 0,1 | 40191 |
| Drilling of connecting holes DN 150 | - | - | - | - | 973 |
| Cutting to length of NW 150 | - | - | - | - | 991 |
| Sealing material SikaBond TS Fast, 600 ml, tubular bag, black | - | - | - | 0,6 | 6890 |
| Tubular pistol for Sikaflex TS Fast | - | - | - | 1,3 | 6891 |

| | | | | | | | | | |
|-----------------|----------------------------|------------------------------------|---------------------------------|-----------------|---|-------------------------------|-----------------------------|------------------------------|--------------------------|
| LINEFIX® | RECYFIX® STREIF | RECYFIX® GREEN STANDARD | RECYFIX® GREEN SUPER | DACHFIX® | RECYFIX®POINT FASERFIX®POINT | FASERFIX® STANDARD | SLOTTED CHANNELS | RECYFIX® STANDARD | RECYFIX® PLUS |
|-----------------|----------------------------|------------------------------------|---------------------------------|-----------------|---|-------------------------------|-----------------------------|------------------------------|--------------------------|

RECYFIX®STANDARD 200

RECYFIX®STANDARD 200 - Combi article, class B 125


Type 010 with mesh grating
MW 30/30, galvanised,
locked

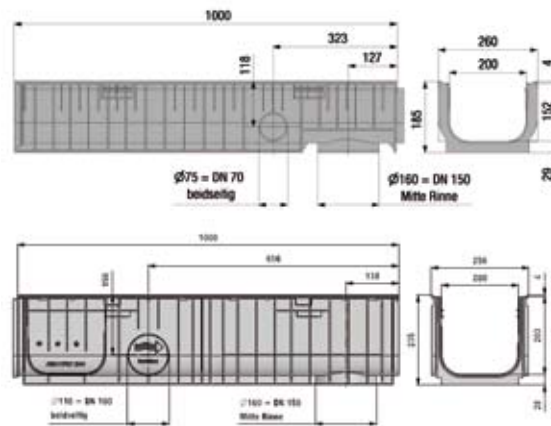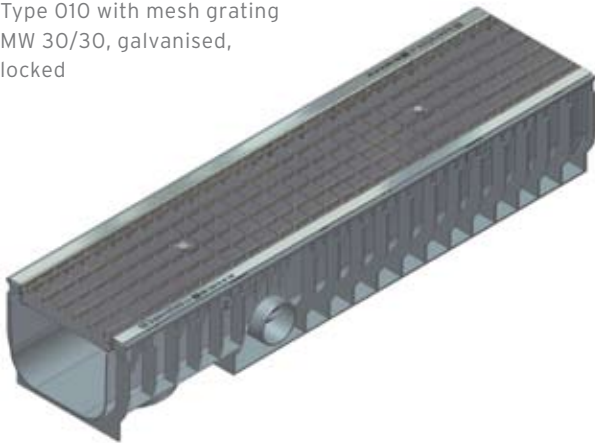

| | Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|--|--------------|-------------|--------------|---|---|--------------|----------------|
| Type 010 with mesh grating MW 30/30, galvanised, locked | 1000 | 256 | 185 | 290 | 1620 | 9,3 | 40672 |
| Type 020 with mesh grating MW 30/30, galvanised, locking device | 1000 | 256 | 235 | 366 | 1620 | 10,2 | 40676 |
| Type 010 with mesh grating MW 30/10, galvanised, locked | 1000 | 256 | 185 | 290 | 1442 | 11,2 | 40685 |
| Type 020 with mesh grating MW 30/10, galvanised, with locking device | 1000 | 256 | 235 | 366 | 1442 | 11,3 | 40686 |

RECYFIX®STANDARD 200 - Combi article, class C 250

Type 010 with ductile iron
grating 2 x 85/20, black,
locked

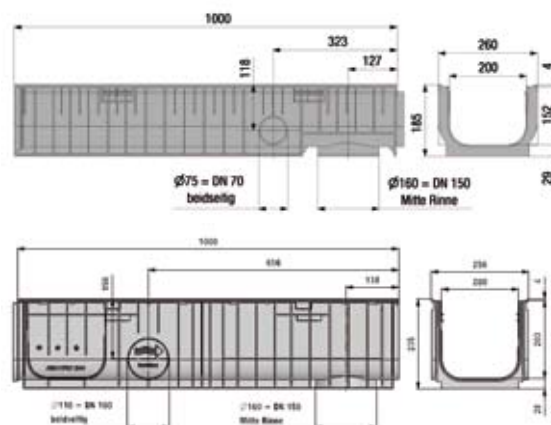



| | Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|--|--------------|-------------|--------------|---|---|--------------|----------------|
| Type 010 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 1000 | 256 | 185 | 290 | 825 | 15,4 | 40665 |
| Type 020 with GUGI-Ductile iron mesh grating MW 20/30, black, locked | 1000 | 256 | 235 | 366 | 825 | 15,8 | 40666 |
| Type 010 with ductile iron grating 2 x 85/20, black, locked | 1000 | 256 | 185 | 290 | 822 | 15,0 | 40660 |
| Type 020 with ductile iron grating 2 x 85/20, black, locked | 1000 | 256 | 235 | 366 | 822 | 15,4 | 40661 |

RECYFIX®STANDARD 200

RECYFIX®STANDARD 200 - Accessories



Trash box with mesh grating MW 30/10, galvanised, cl. B 125, locked



End cap combined made of PE-PP with outlet DN 70, Type 010

| | Length mm | Width mm | Height mm | Weight kg | Article No. |
|--|--------------|-------------|--------------|--------------|----------------|
| Trash box with mesh grating MW 30/30, galvanised, cl. B 125, locked | 500 | 256 | 734 | 27,0 | 40656 |
| Trash box with mesh grating MW 30/10, galvanised, cl. B 125, locked | 500 | 256 | 734 | 28,6 | 40657 |
| Trash box with GUGI-Ductile iron mesh grating MW 20/30, black, cl. C 250, locked | 500 | 256 | 734 | 30,8 | 40653 |
| Trash box with ductile iron grating 2 x 85/20, black, class C 250, locked | 500 | 256 | 734 | 30,6 | 40654 |
| End cap combined made of PE-PP with outlet DN 70, Type 010 | - | 258 | 185 | 0,2 | 40692 |
| End cap closed, Type 01 | - | 260 | 275 | 0,9 | 12081 |
| Drilling of connecting holes DN 200 | - | - | - | - | 974 |
| Cutting to length of NW 200 | - | - | - | - | 992 |
| Sealing material SikaBond TS Fast, 600 ml, tubular bag, black | - | - | - | 0,6 | 6890 |
| Tubular pistol for Sikaflex TS Fast | - | - | - | 1,3 | 6891 |

RECYFIX®
PLUS

RECYFIX®
STANDARD

SLOTTED
CHANNELS

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

DACHFIX®

RECYFIX®
GREEN SUPER

RECYFIX®
GREEN STANDARD



RECYFIX®
STREIF

LINEFIX®

RECYFIX®STANDARD 300

RECYFIX®STANDARD 300 - Combi article, class C 250

Type 010 with GUGI-Ductile iron mesh grating, MW 20/30, black, locked



| Length mm | Width mm | Height mm | Drainage cross- sect. cm ² | Intake cross- sect. cm ² /m | Weight kg | Article No. |
|--------------|-------------|--------------|--|---|--------------|----------------|
|--------------|-------------|--------------|--|---|--------------|----------------|

Type 010 with GUGI-Ductile iron mesh grating, MW 20/30, black, locked

| | | | | | | |
|------|-----|-----|-----|------|------|-------|
| 1000 | 420 | 380 | 857 | 1385 | 33,2 | 40875 |
|------|-----|-----|-----|------|------|-------|

RECYFIX®STANDARD 300 - Accessories



End cap closed, galvanised, Type 010



End cap with horizontal UPVC-outlet DN 200, galvanised, Type 010

| | Length mm | Width mm | Height mm | Weight kg | Article No. |
|--|--------------|-------------|--------------|--------------|----------------|
| End cap closed, galvanised, Type 010 | - | 420 | 380 | 2,8 | 40881 |
| End cap with horizontal UPVC-outlet DN 200, galvanised, Type 010 | - | 420 | 380 | 3,2 | 40891 |
| Drilling of connecting holes DN 200 | - | - | - | - | 974 |
| Cutting to length of NW 300 | - | - | - | - | 993 |
| Sealing material SikaBond TS Fast, 600 ml, tubular bag, black | - | - | - | 0,6 | 6890 |
| Tubular pistol for Sikaflex TS Fast | - | - | - | 1,3 | 6891 |